






PROMOTIVE EFB

Key benefits

 Made in Germany

 Patented PowerFrame® grid for reliable starting power, fast recharge and corrosion resistance

 Meets all original criteria of the commercial vehicle manufacturer

For more information visit www.varta-automotive.com

ORDER INFORMATION

European Type No. (ETN):	690 500 105
Article Number:	690 500 105 E65 2
Short Code:	B90
Barcode:	4016987149058
UK Code:	629EFB
Packaging Unit:	1
Quantity per Pallet:	0

TECHNICAL INFORMATION

Voltage [V]:	12	Base Hold-down:	B00
Battery Capacity [Ah]:	190	Layout:	3
Cold Cranking Amps (CCA), EN [A]:	1050	Terminal Types:	1
Length [mm]:	513	Case Size:	B
Width [mm]:	223	Weight filled (kg):	47,21
Height [mm]:	223		

KEY BENEFITS



40% LONGER LIFE
than any other battery



**SUPERIOR
VIBRATION
RESISTANCE**



MADE IN GERMANY
manufactured to the highest
quality standards




ORIGINAL SPARE PART
the largest manufacturers
trust this product

MIXING ELEMENT

The mixing element exclusively developed by VARTA® optimizes charge acceptance and increases service life by greatly reducing acid layering. The mixing element uses the natural movement of the vehicle in the process.

SUPERIOR VIBRATION RESISTANCE

Injection molded supports and additional connector fixation, withstand even the most severe conditions on the road. Ripped off plates and broken connectors are prevented and they are held securely in position instead. The innovative technology meets the very highest OEM requirements for end of frame installation.

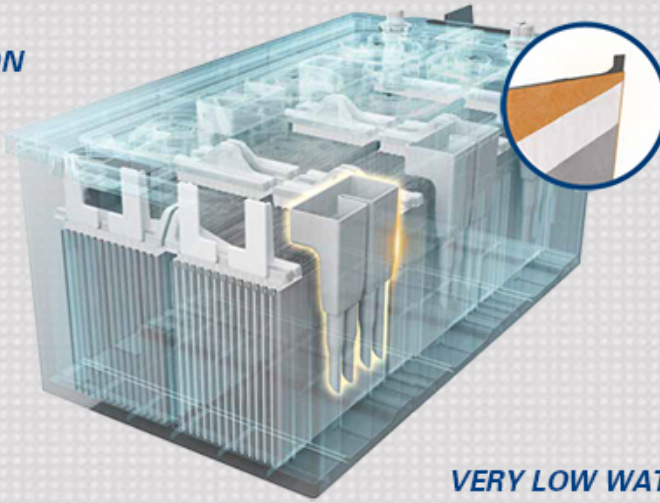

LONGER CYCLE LIFE

Take advantage of considerably longer cycle life than with conventional batteries.

MODERN EFB TECHNOLOGY

An additional polyester scrim and glued mat ensure excellent adhesion of the grid to the mass. This means the mass is surrounded by a special mat so that it does not detach. This provides a longer cycle life than with conventional batteries.

VERY LOW WATER CONSUMPTION

The labyrinth cover design was especially developed by VARTA® and provides 100% protection against leaks, even when tilted up to 90°.